

## PRODUCT DATA SHEET

# SikaBiresin® TD150 (SikaBiresin® TD150 / TRANSLUX D150)

## EPOXY CASTING RESIN WITH HIGH TRANSPARENCY SUITABLE FOR DEEP POURING

### APPLICATIONS

- For applications furniture, art and decoration to make deep pour transparent and UV resistant castings such as river table, embeddings, mock-ups, trophies

### MAIN PROPERTIES

- High transparency
- Low viscosity
- Self-degassing behaviour
- Single pour casting up to 45 mm @ 20°C
- Good UV resistance

### DESCRIPTION


Basis	Two component epoxy system
Component A	<b>SikaBiresin® TD150</b> , epoxy resin, unfilled, bluish-transparent
Component B	<b>SikaBiresin® TD150</b> , amine, unfilled, transparent

### PHYSICAL PROPERTIES


Components		Resin (A)	Hardener (B)
		<b>SikaBiresin® TD150</b>	<b>SikaBiresin® TD150</b>
Viscosity, 25 °C	mPa.s	~ 500	~ 100
Mixing ratio	in parts by weight	100	45
	in parts by volume	100	50
Colour		Mixture transparent	
Viscosity, 25 °C	mPa.s	~ 300	
Reactivity on 500 g, 23 °C*	h	~ 17	
(Max. exothermic temperature)	°C	~ 35	

\* refer to the graph below, influence of room temperature (RT) on exothermic reaction and curing time on 500 g casted in a plastic cup in thickness 90 mm

### SikaBiresin® TD150 Reactivity and exothermy vs room temperature

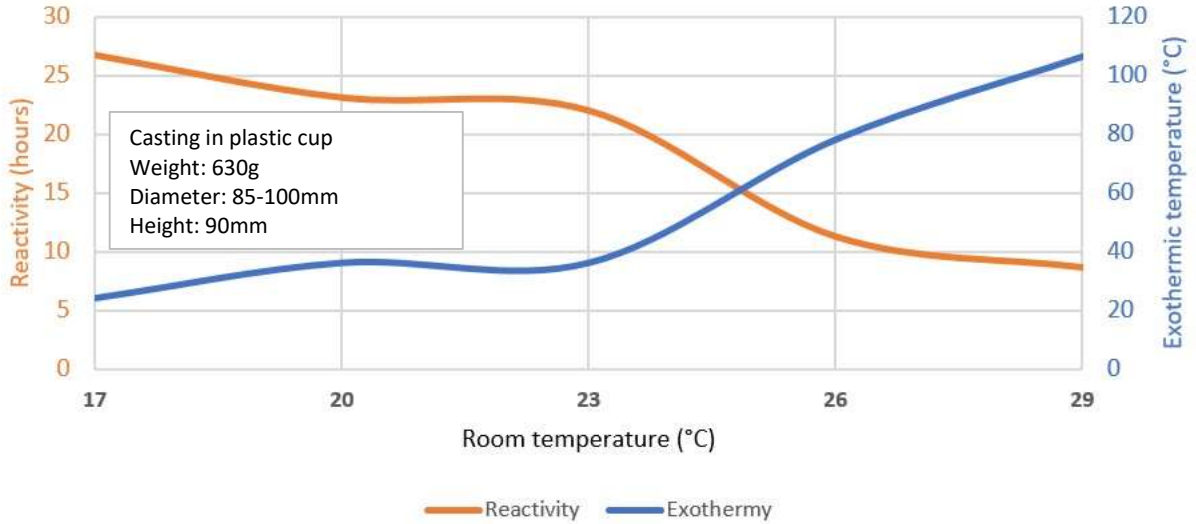

### SikaBiresin® TD150 Reactivity vs time & temperature

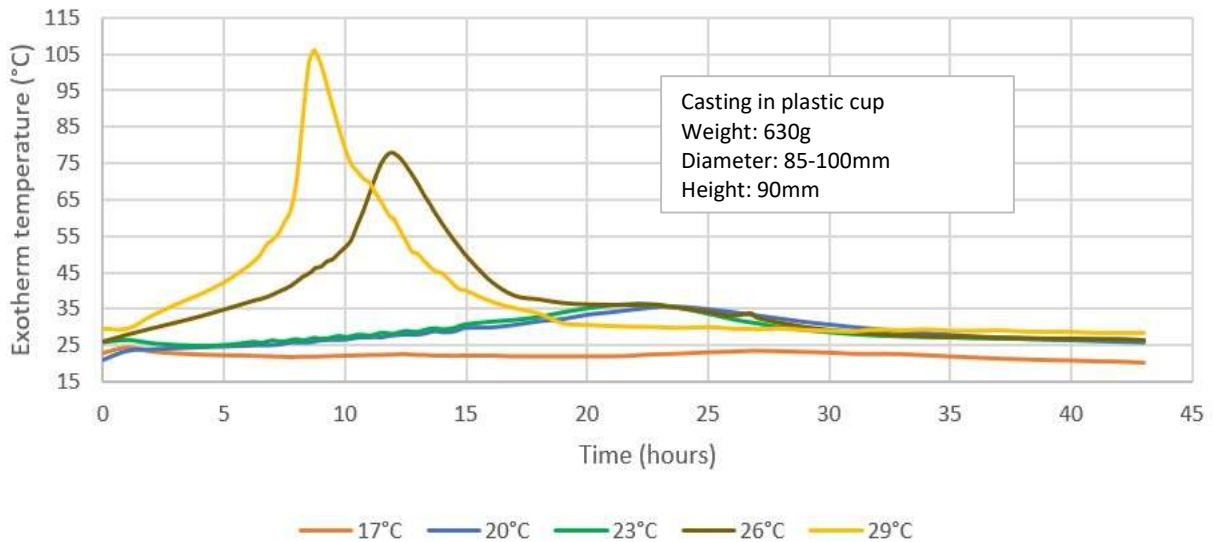

## MECHANICAL AND THERMAL PROPERTIES

approx. values on standard-sized specimen / after curing 7 days at room temperature

Shore hardness	ISO 868	Shore D1	D 80
Elongation at maximum strength	ISO 527	%	4,5
Flexural modulus	ISO 178	MPa	2,100
Glass transition temperature (TG)	ISO 11359-2	°C	39
Glass transition temperature (TG) after 16H at 50°C	ISO 11359-2	°C	47

## SPECIFIC PROPERTIES

Maximum casting thickness on plate 350 x 300 mm	Room temperature	Thickness (mm)
Lowest temperature to work with	17 °C	80
	20 °C	45
	23 °C with fan	70
	23 °C	35-40
	26 °C	30
Highest temperature to work with	29°C	25

## PACKAGING UNITS

- |   |                               |
|---|-------------------------------|
| ■ Resin (A), <b>SikaBiresin® TD150</b>    | 1000 kg / 220 kg / 5 kg net   |
| ■ Hardener (B), <b>SikaBiresin® TD150</b> | 950 kg / 200 kg / 2.25 kg net |

## PROCESSING DATA

- Room temperature is the most important parameter to be successful in SikaBiresin® TD150 casting. There is a link in between room temperature (RT), volume of cast resin and curing speed. A speed curing caused by warm RT creates high exothermic reaction and cured resin could be yellow with streaks on top.
- Above 4kg volume and a casting height of more than 40mm it is recommended to decrease the exothermic temperature by using a fan or reducing the room temperature.
- Mixing should be done by hand or with an electric mixer. Be careful not to incorporate too much air while mixing. Emulsion must be avoided.
- After a primary mixing in a bucket pour the product in a second bucket and finish the mixing. Scrap well the walls of the mixing container. Leave the mixing for a self-degassing for at least 15 to 30 minutes prior to cast or use a vacuum chamber.
- According to long pot life and low viscosity the casting frame must be perfectly tight. Brown PE packing tape is self-releasing from the resin and could be used in corners of the box and anywhere resin should not bond on support.
- A liquid or pasty wax could be also used to prevent bonding on models and supports. The wood or porous surfaces of models must be sealed before casting the resin. Quick setting epoxy or a varnish could be used but sealer must be cured prior to casting of SikaBiresin® TD150.
- After casting and some relaxation time the remaining bubbles can easily be removed with a hot airstream gun (sweep the surface at 15 – 20 cm of distance).
- A thin sanding and polishing are almost always needed to get shiny and flat surface. Use appropriate tools in order to avoid heat on the resin when polishing. Water sandpaper is advised.
- Prolonged intensive UV exposure can lead to optical changes or changes in transparency.

## STORAGE CONDITIONS

Shelf life	<ul style="list-style-type: none"><li>Resin (A), <b>SikaBiresin® TD150</b> 12 months</li><li>Hardener (B), <b>SikaBiresin® TD150</b> 12 months</li></ul>
Storage temperature	<ul style="list-style-type: none"><li>Resin (A), <b>SikaBiresin® TD150</b> 15 – 25 °C</li><li>Hardener (B), <b>SikaBiresin® TD150</b> 15 – 25 °C</li></ul>
Crystallization	<ul style="list-style-type: none"><li>After prolonged storage at low temperature, crystallization of A (RESIN) component may occur.</li><li>This is easily removed by warming up for a sufficient time to a maximum of 70 °C.</li><li>Allow to cool to requested processing temperature before use.</li></ul>
Opened packagings	<ul style="list-style-type: none"><li>Containers must be closed tightly immediately after use to prevent moisture ingress.</li><li>The residual material needs to be used up as soon as possible.</li></ul>

### FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Advanced Resins. Copies of the following publications are available on request: Safety Data Sheets

### BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

### HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

### LEGAL NOTICE

The information, and, in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

---

## Contact

---

### SIKA DEUTSCHLAND GMBH

Business Unit Industry  
Stuttgarter Straße 139  
72574 Bad Urach  
Phone: +49 7125 940-7692  
E-Mail: [industry@de.sika.com](mailto:industry@de.sika.com)  
Website: [www.sika.de](http://www.sika.de)

### SIKA AUTOMOTIVE FRANCE S.A.S.

ZI des Béthunes - 15, Rue de l'Équerre  
95310 Saint-Ouen-l'Aumône  
CS 40444  
95005 Cergy Pontoise Cedex - FRANCE  
Phone: +33 1 34 40 34 60  
Fax: +33 1 34 21 97 87  
E-Mail: [advanced.resins@fr.sika.com](mailto:advanced.resins@fr.sika.com)  
Website: [www.sikaadvancedresins.fr](http://www.sikaadvancedresins.fr)

### Sika S.A.U.

Carretera de Madrid a Irún – km 14.5  
P.I. Congost 28108 Alcobendas (Madrid) - SPAIN  
Phone: +34 93 225 16 20  
E-Mail: [sar-sales@es.sika.com](mailto:sar-sales@es.sika.com)  
Website: [www.sikaadvancedresins.es](http://www.sikaadvancedresins.es)

### Sika Italia S.p.A.

Via Luigi Einaudi 6  
20068 Peschiera Borromeo (MI) - Italy  
Phone: +39 02 54778111  
Fax +39 02 54778 119  
E-Mail: [info@sika.it](mailto:info@sika.it)  
Website: [www.sika.it](http://www.sika.it)

### Sika Limited

Head Office, Watchmead – Welwyn  
Garden City – AL7 1BQ – United Kingdom  
Phone: +44 1707 394444  
E-Mail: [industry-sales@uk.sika.com](mailto:industry-sales@uk.sika.com)  
Website: [www.gbr.sika.com](http://www.gbr.sika.com)

### SIKA AUTOMOTIVE SLOVAKIA S.R.O.

Tovarenska 49  
953 01 Zlate Moravce - SLOVAKIA  
Phone: +421 2 5727 29 33  
Fax: +421 37 3000 087  
E-Mail: [SikaAdvancedResins@sk.sika.com](mailto:SikaAdvancedResins@sk.sika.com)  
Website: [www.sikaadvancedresins.com](http://www.sikaadvancedresins.com)

### Sika Industry – Tooling, Resins and Marine

30800 Stephenson Highway  
Madison Heights, Michigan 48071 - USA  
Phone: +1 248 588 2270  
Fax: +1 248 616 7452  
E-Mail: [advanced.resins@us.sika.com](mailto:advanced.resins@us.sika.com)  
Website: [www.sikaindustry.com](http://www.sikaindustry.com)

### SIKA AUTOMOTIVE EATON RAPIDS, INC.

1611 Hults Drive  
Eaton Rapids, Michigan 48827 - USA  
Phone: +1 517 663 81 91  
Fax: +1 517 663 05 23  
E-Mail: [advanced.resins@us.sika.com](mailto:advanced.resins@us.sika.com)  
Website: [www.sikaadvancedresins.us](http://www.sikaadvancedresins.us)

### SIKA MEXICANA SA de CV

Av. Gustavo Baz #309 Centrum Park  
54060 Tlanepantla Estado de MEXICO  
Phone: +52 442 238 5800  
E-Mail: [roman.octavio@mx.sika.com](mailto:roman.octavio@mx.sika.com)

### SIKA AUTOMOTIVE SHANGHAI CO. LTD.

N°53 Tai Gu Road  
Wai Gao Qiao  
Free Trade Zone, Pudong  
200131 Shanghai - CHINA  
Phone: +86 21 58 68 30 37  
Fax: +86 21 58 68 26 01  
E-Mail: [industry@cn.sika.com](mailto:industry@cn.sika.com)  
Website: [www.sika.cn](http://www.sika.cn)

### Sika Ltd.

10 F, Shinagawa Intercity Tower B.  
2-15-2 Konan, Minato-ku  
Tokyo 108-6110 - JAPAN  
Phone: +81 3 6433 2314  
Fax: +81 3 6433 2102  
E-Mail: [advanced-resins@jp.sika.com](mailto:advanced-resins@jp.sika.com)  
Website: [www.jpn.sika.com](http://www.jpn.sika.com)

### SIKA INDIA PVT LTD,

Plot No. Pap-V-90/1,  
Chakan Industrial Area,  
Phase-II, Vasuli, Khed, PUNE,  
Maharashtra – 410501  
E-Mail: [info.india@in.sika.com](mailto:info.india@in.sika.com)