

PRODUCT DATA SHEET

Sikaflex®-953 L15

Fast-curing two-component STP assembly adhesive and sealant

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Properties	Sikaflex®-953 L15 A	Sikaflex®-905 B
Chemical base	2-component silane terminated polymer (STP)	
Color (CQP001-1)	White	white
Density (uncured)	1.4 kg/l (11.7 lb/gal)	1.2 kg/l (10.0 lb/gal)
	mixed	1.4 kg/l (11.7 lb/gal)
Mixing ratio	A:B by volume	10 : 1
	A:B by weight	11.7 : 1
Non-sag properties (CQP061-1)	Fair	
Application temperature	5 – 40 °C (41 – 104 °F)	
Skin time (CQP019-1)	20 minutes ^A	
Open time (CQP526-1)	15 minutes ^A	
Curing speed (CQP046-1)	(see table) ^A	
Shrinkage (CQP014-1)	2 %	
Shore A hardness (CQP023-1 / ISO 7619-1)	50	
Tensile strength (CQP036-1 / ISO 527)	2.5 MPa (360 psi)	
Elongation at break (CQP036-1 / ISO 527)	450 %	
Tear propagation resistance (CQP045-1 / ISO 34)	10 N/mm (55 pli)	
Tensile lap-shear strength (CQP046-1 / ISO 4587)	1.5 MPa (220 psi)	
Thermal resistance (CQP 513-1)	1 hour	160 °C (320 °F)
Service temperature (CQP513-1)	-45 – 90 °C (-49 – 194 °F)	
Shelf life (CQP016-1)	9 months ^B	
Mixer	Statomix® MS 13-18-G	

CQP = Corporate Quality Procedure

^A) 23 °C (73 °F) / 50 % r.h.^B) storage between 5 and 25 °C (41 and 77 °F), B-component is frost sensitive
DESCRIPTION

Sikaflex®-953 L15 is a 2-component Silane Terminated Polymer (STP) assembly adhesive which cures by chemical reaction of the two components. Owing to its good weathering resistance and gap-filling performance it can also be used for exterior sealing joints. It is also very suitable where pumping over a long distance is required.

PRODUCT BENEFITS

- Pumpable over long distances
- Minimal pre-treatment required for most common substrates
- Solvent- and isocyanate-free
- Good gap-filling capabilities
- Great weathering and aging resistance

AREAS OF APPLICATION

Sikaflex®-953 L15 is suitable for bonding components exposed to dynamic stress and where the attainment of early strength is required. Common substrates are metals, particularly aluminum (including anodized), steel (including phosphated, chromated, galvanized), metal primers and paint coatings (2-part systems), ceramic materials and plastics.

Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-953 L15 on materials prone to stress cracking. This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

PRODUCT DATA SHEET

Sikaflex®-953 L15

Version 01.01 (11 - 2020), en_US

012301219530001100

CURE MECHANISM

The curing of Sikaflex®-953 L15 takes place by chemical reaction of the two components.

Time [h]	Strength [MPa]
2	0.4 (60 psi)
4	0.9 (130 psi)
6	1.1 (160 psi)

Table 1: Lap shear strength (CQP 046-1) at 23 °C (73 °F) / 50 % r.h.

CHEMICAL RESISTANCE

Sikaflex®-953 L15 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

METHOD OF APPLICATION

Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

Application

Sikaflex®-953 L15 need to be processed with an adequate dispensing system. The mixer type needs to be respected (see table Typical Product Data).

Sikaflex®-953 L15 can be applied between 5 °C and 40 °C (41 °F and 104 °F) but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C (59 °F and 77 °F).

To ensure a uniform thickness of the bondline it is recommend to apply the adhesive in form of a triangular bead (see figure 1).

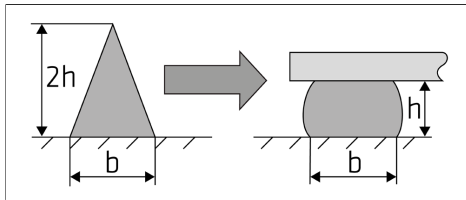


Figure 1: Recommended bead configuration

The open time is significantly shorter in hot and humid climate. The parts must always be joined within the open time. As a rule of thumb, a change of + 10 °C (+ 18 °F) reduces the open time by half.

Sikaflex®-953 L15 can be processed with pump equipment. For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

Tooling and finishing

Tooling and finishing must be carried out within the open time of the adhesive. We recommend the use of Sika® Slick. Other finishing agents of lubricates must be tested for suitability and compatibility.

Removal

Uncured Sikaflex®-953 L15 can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using a suitable industrial hand cleaner and water.

Do not use solvents on skin.

Overpainting

Sikaflex®-953 L15 can be best painted within the skin formation time. If painting process takes place after the sealant has built a skin, adhesion could be improved by treating the joint surface with Sika® Aktivator-100 or Sika® Aktivator-205 prior to paint process. If the paint requires a baking process (> 80 °C / 176 °F), best performance is achieved by allowing the sealant to fully cure first. All paints have to be tested by carrying preliminary trials under manufacturing conditions. The elasticity of paints is usually lower than that of sealants. This could lead to cracking of the paint in the joint area.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
 - General Guidelines
- Bonding and Sealing with 1-component Sikaflex®

PACKAGING INFORMATION

Sikaflex®-953 L15 (A)

Pail	23 l
Drum	195 l

Sikaflex®-905 (B)

Pail	23 l
------	------

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

LEGAL DISCLAIMER

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by contacting SIKA's Technical Service Department via email at tsmh@us.sika.com. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.** Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling +1 800-933-7452.

PRODUCT DATA SHEET

Sikaflex®-953 L15
Version 01.01 (11 - 2020), en_US
012301219530001100

Sika Corporation
30800 Stephenson Highway
Madison Heights, MI 48071
U.S.A.
Telephone: +1 248-577-0020
Email: tsmh@us.sika.com
www.sikausa.com

