

PRODUCT DATA SHEET

Sikaflex®-268

Assembly & glazing adhesive and sealant for rail applications with acceleration option

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	1-component polyurethane
Color (CQP001-1)	Black
Cure mechanism	Moisture-curing
Density (uncured)	1.3 kg/l
Non-sag properties (CQP061-1)	Very good
Application temperature	5 – 40 °C
Skin time (CQP019-1)	60 minutes ^A
Open time (CQP526-1)	40 minutes ^A
Curing speed (CQP049-1)	(see diagram)
Shrinkage (CQP014-1)	1 %
Shore A hardness (CQP023-1 / ISO 48-4)	55
Tensile strength (CQP036-1 / ISO 527)	6 MPa
Elongation at break (CQP036-1 / ISO 527)	500 %
Tear propagation resistance (CQP045-1 / ISO 34)	13 N/mm
Tensile lap-shear strength (CQP046-1 / ISO 4587)	4.5 MPa
Service temperature (CQP509-1 / CQP513-1)	-50 – 90 °C
Shelf life (CQP016-1)	cartridge / unipack pail / drum
	12 months ^B 6 months ^B

CQP = Corporate Quality Procedure

^A) 23 °C / 50 % r. h.^B) storage below 25 °C)

DESCRIPTION

Sikaflex®-268 is an adhesive system specifically designed for the rail industry. It is suitable for assembly bonding and glazing applications; its outstanding weathering resistivity and unique resistance to a wide variety of cleaning agents make it an ideal solution for use in exterior joints in the rail industry. Sikaflex®-268 is compatible with Sika's black-primerless bonding process. Sikaflex®-268 can be accelerated with Sika's Booster and PowerCure systems.

PRODUCT BENEFITS

- Resistant to a wide variety of cleaning agents
- Passes EN45545 R1/R7 HL3
- Curing can be accelerated with Sika Booster and Sika PowerCure
- Excellent weathering stability
- Very good processing and tooling characteristics
- Solvent-free

AREAS OF APPLICATION

Sikaflex®-268 is designed for assembly and direct-glazing applications in rail, the commercial vehicle industry and for the repair market.

It exhibits excellent tooling and application properties. With its superior resistance to a wide range of cleaning agents combined with outstanding weathering resistance, it can be used for exterior joints.

Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-268 on materials prone to stress cracking. Sikaflex®-268 is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

PRODUCT DATA SHEET

Sikaflex®-268

Version 04.01 (04 - 2022), en_DK
012001212680001000

CURE MECHANISM

Sikaflex®-268 cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

Diagram 1: Curing speed Sikaflex®-268

CHEMICAL RESISTANCE

Sikaflex®-268 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

It is resistant to a wide range of rail cleaning agents if used according to the guidelines of the manufacturer. Some rail cleaning agents contain aggressive chemicals such as phosphoric acids which may influence the durability of Sikaflex®-268 significantly. Therefore it is of highest importance to limit the exposure time to a minimum, observe correct dilution of cleaning agent and to perform a thorough rinsing after the cleaning process. Test newly introduced cleaning agents.

The above information is offered for general guidance only. Advice on specific applications will be given on request.

METHOD OF APPLICATION

Surface preparation

Surfaces must be clean, dry and free from grease, oil and dust. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

Application

Sikaflex®-268 can be processed between 5 °C and 40 °C (climate and product) but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C.

Consider the viscosity increase at low temperature. For easy application, condition the adhesive at ambient temperature prior to use. To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

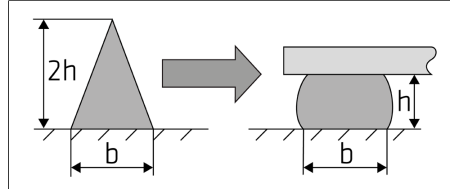


Figure 1: Recommended bead configuration

Sikaflex®-268 can be processed with hand, pneumatic or electric driven piston guns as well as pump equipment. The open time is significantly shorter in hot and humid climate. The parts must always be installed within the open time. Never join bonding parts if the adhesive has built a skin.

For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

Tooling and finishing

Tooling and finishing must be carried out within the open time of the adhesive. We recommend the use of Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility.

Removal

Uncured Sikaflex®-268 can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water. Do not use solvents on skin.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guidelines
- Bonding and Sealing with 1-component Sikaflex®

PACKAGING INFORMATION

Cartridge	300 ml*
Unipack	600 ml
Pail	23 l*
Drum	195 l

* Not on stock in DK

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

PRODUCT DATA SHEET

Sikaflex®-268
Version 04.01 (04 - 2022), en_DK
012001212680001000

Sika Danmark A/S
Hirsemarken 5
3520 Farum
Tlf. +45 48 18 85 85
www.sika.dk

